

# MOTORIZED ROLLER CONVEYOR WORKSHEET



Company \_\_\_\_\_ Date \_\_\_\_\_  
 Contact \_\_\_\_\_ Quote Due \_\_\_\_\_ Desired Delivery \_\_\_\_\_  
 Phone No. \_\_\_\_\_ Contact Email \_\_\_\_\_ State \_\_\_\_\_  
 ConveyX Solutions, LLC Sales Contact \_\_\_\_\_ Quote #: \_\_\_\_\_  
 Quantity \_\_\_\_\_

### Product Specs:

Max:  
 - Width (inches): \_\_\_\_\_ Length (inches): \_\_\_\_\_  
 - Height (inches): \_\_\_\_\_ Weight (lbs): \_\_\_\_\_  
 Min:  
 - Width (inches): \_\_\_\_\_ Length (inches): \_\_\_\_\_  
 - Height (inches): \_\_\_\_\_ Weight (lbs): \_\_\_\_\_  
 Description: \_\_\_\_\_  
 Max. Qty.: \_\_\_\_\_ Total Live Load: \_\_\_\_\_  
 Temperature  
 -Environment: \_\_\_\_\_  
 -Product: \_\_\_\_\_

### Roller Specs:

- 2.5" OD x 11 Ga Mild Steel
- 1.9" OD x 16 Ga Galv.
- Other: \_\_\_\_\_
- Urethane Sleeves: \_\_\_\_\_

### Support Type:

- Legs
- Ceiling Supports TOR \_\_\_ +/- \_\_\_\_\_

### Side Guides:

- One Side
- Both Sides

End Stop: Height \_\_\_\_\_ Qty: \_\_\_\_\_

### Application Type:

- Transportation
- Zero Pressure - Zone Length \_\_\_\_\_

### Conveyor Construction:

- Between Frame (BF) \_\_\_\_\_
- Roller C/C \_\_\_\_\_
- Roller Height:  1/4" high  1-3/4" low
- Straight Length: \_\_\_\_\_
- Curve - Degree: \_\_\_\_\_
- Inside Radius (I.R.): \_\_\_\_\_
- Bolt-Together
  - Galvanized
  - Powder Coat
  - Color/RAL: \_\_\_\_\_
- Welded
  - Powder Coat
  - Gloss Black
  - Color/RAL: \_\_\_\_\_

### Power Supply

#### Plant Voltage:


- 110V Single Phase
- 460V Three Phase
- 220V Single Phase

#### Speed:

- Fixed \_\_\_\_\_ FPM
- Variable \_\_\_\_\_ to \_\_\_\_\_ FPM

### Drive Method:

- High Tension Urethane Bands (<100 lb capacity)
- Poly-Ribbed Belt
- 40 Series Chain

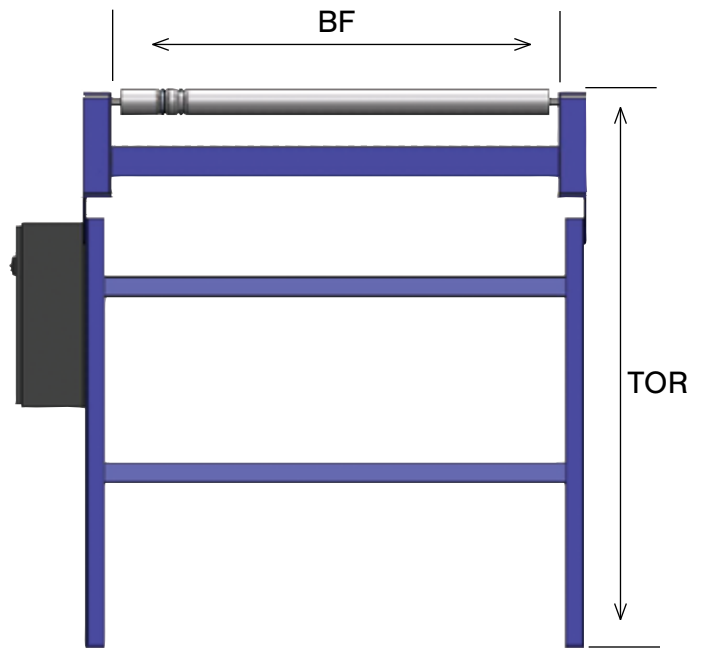

Notes: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

Approval Drawing Required:  Yes  No

